

INTELLECTUAL PROPERTY LAW
KNOBBE, MARTENS, OLSON & BEAR
A LIMITED LIABILITY PARTNERSHIP INCLUDING
PROFESSIONAL CORPORATIONS

PATENT, TRADEMARK AND COPYRIGHT CAUSES
620 NEWPORT CENTER DRIVE
SIXTEENTH FLOOR
NEWPORT BEACH, CALIFORNIA 92660-8016
(714) 760-0404
FAX (714) 760-9502
INTERNET WWW.KNOB.COM

ANN A BYUN
ROBERT F. GAZDZINSKI
FRED C. HERNANDEZ
STACEY R. HALPERN†
R. SCOTT WEIDE
JOSEPH J. BASISTA
MICHAEL K. FRIEDLAND
DALE C. HUNT
CHAD W. MILLER
JOHN C. WILSON
LEE W. HENDERSON
MARK M. ABUMERI
JON W. GURKA
KATHERINE W. WHITE
DEBORAH S. SHEPHERD
RICHARD E. CAMPBELL
ERIC M. NELSON
ALEXANDER C. CHEN
MARK R. BENEDICT
PAUL N. CONOVER
MICHAEL T. CRUZ
JOHN P. MUSONE
ROBERT J. ROBY
SABING H. LEE
JENNY G. KO
KAROLINE A. DELANEY
JOHN W. HOLCOMB

OF COUNSEL
JERRY R. SEILER
JAPANESE PATENT ATTY
KATSUHIRO ARAI
EUROPEAN PATENT ATTY
MARTIN HELLEBRANDT
KOREAN PATENT ATTY
MINCHEOL KIM
CHINESE PATENT ATTY
JIAWEI HUANG
SCIENTISTS & ENGINEERS
(NON-LAWYERS)
RAYMOND J. SALENIEKS**
RENEE E. CANUSO**
MICHAEL L. FULLER**
NEIL S. BARTFELD**
MICHAEL J. GILLY
HALIT N. YAKUPOGLU
DANIEL E. JOHNSON**
JEFFERY KOEPKE
KHURRAM RAHMAN

LOUIS J. KNOBBE
DON W. MARTENS
GORDON H. OLSON
JAMES B. BEAR
DARRELL L. OLSON
WILLIAM B. BUNKER
WILLIAM H. NIEMAN
LOWELL ANDERSON
ARTHUR S. ROSE†
JAMES F. LESNIAK
NED A. ISRAELSEN
DREW S. HAMILTON
JERRY T. SEWELL
JOHN B. SGANGA, JR.
EDWARD A. SCHLATTER
GERARD VON HOFFMANN
JOSEPH R. RE
CATHERINE J. HOLLAND
JOHN M. CARSON
KAREN VOGEL WEIL†
ANDREW H. SIMPSON
JEFFREY L. VAN HOOSEAR
DANIEL E. ALTMAN
ERNEST A. BEUTLER
MARGUERITE L. GUNN
STEPHEN C. JENSEN
VITO A. CANUSO III
WILLIAM H. SHREVE
LYNDA J. ZADRA-SYMES**
STEVEN J. NATAUPSKY
PAUL A. STEWART
JOSEPH F. JENNINGS
CRAIG S. SUMMERS
ANNEMARIE KAISER
BRENTON R. BABCOCK†
THOMAS F. SMERAL, JR.
MICHAEL H. TRENHOLM
DIANE M. REED
JONATHAN A. BARNEY
RONALD J. SCHOENBAUM
JOHN R. KING
FREDERICK S. BERRETTA
NANCY WAYS VENSKO
RICHARD C. GILMORE
JOHN P. GIEZENTANNER
ADEEL S. AKHTAR
THOMAS R. ARNO
DAVID N. WEISS
DANIEL HART
JAMES T. HAGLER
DOUGLAS G. MUEHLHAUSER
LORI L. YAMATO
STEPHEN M. LOBBIN
RICHARD C. KIM

Assistant Commissioner for Patents
Washington, D.C. 20231

CERTIFICATE OF MAILING BY "EXPRESS MAIL"

Attorney Docket No. : MICRON.003C1
Applicant(s) : Fazan et al.
For : STREAMLINED FIELD ISOLATION
PROCESS
Attorney : James B. Bear
"Express Mail"
Mailing Label No. : EM4240211774US
Date of Deposit : March 10, 1998

I hereby certify that the accompanying

Transmittal in Duplicate; Specification in 9 pages; 4 sheets of drawings;
Declaration by inventors in 2 pages **COPY FROM PARENT CASE**; Power of
Attorney form and copy of assignment **COPIES FROM PARENT CASE**;
Check(s) for Filing Fee(s); Return Prepaid Postcard

are being deposited with the United States Postal Service "Express Mail Post Office to
Addressee" service under 37 CFR 1.10 on the date indicated above and are addressed to the
Assistant Commissioner for Patents, Washington, D.C. 20231.


DON L. KING

MICRON.EXP is
031098

275 BATTERY STREET
SUITE 1840
SAN FRANCISCO, CALIFORNIA 94111
(415) 954-4114
FAX (415) 954-4111

501 WEST BROADWAY
SUITE 1400
SAN DIEGO, CALIFORNIA 92101
(619) 235-8550
FAX (619) 235-0176

3801 UNIVERSITY AVENUE
SUITE 710
RIVERSIDE, CALIFORNIA 92501
(909) 781-9231
FAX (909) 781-4507

* A PROFESSIONAL CORPORATION
† ALSO MEMBER OF D.C. BAR
** ALSO BARRISTER AT LAW (U.K.)
*** U.S. PATENT AGENT

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

ATTENTION: APPLICATION BRANCH

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): **Pierre C. Fazan, Viju K. Matthews and Nanseng Jeng**

For: **STREAMLINED FIELD ISOLATION PROCESS**

Enclosed are:

- (X) 4 sheet(s) of drawings.
- (X) This application is a continuation of prior application 08/519,451, filed August 25, 1995.
- (X) A copy of Declaration from the prior application is enclosed.
- (X) A copy of power of attorney form and copy of assignment from the prior application is enclosed.
- () Deletion of Inventors: Signed statement attached requesting deletion of person(s) not inventor(s) in the present application.
- (X) Incorporation by Reference. The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
- (X) Return prepaid postcard.


CLAIMS AS FILED

FOR	NUMBER FILED	NUMBER EXTRA	RATE	FEE
Basic Fee			\$790	\$790
Total Claims	10 - 20 =	0 x	\$22	\$0.00
Independent Claims	3 - 3 =	0 x	\$82	\$0.00
If application contains any multiple dependent claims(s), then add			\$270	\$0.00
TOTAL FILING FEE				\$790

- (X) A check in the amount of \$790 to cover the filing fee is enclosed.

(X) The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Account No. 11-1410. A duplicate copy of this sheet is enclosed.

(X) Please use Customer No. 20,995 for the correspondence address.



James B. Bear
Registration No. 25,221
Attorney of Record

ASA-3642 is
031098

620 NEWPORT CENTER DR 16TH FLOOR NEWPORT BEACH, CA 92660
(714) 760-0404 FAX (714) 760-9502

STREAMLINED FIELD ISOLATION PROCESS

Field of the Invention

The invention relates generally to silicon integrated circuit fabrication. In particular, the invention pertains to the device isolation processes involving the local oxidation of silicon.

Background of the Invention

Implementing electric circuits in an integrated process involves connecting isolated devices through specific electrical paths. In silicon ultra large scale integration, effective device isolation becomes increasingly important as device dimensions become smaller and packing density rises.

In conventional Metal-Oxide-Silicon (MOS) device fabrication, device isolation is often implemented by means of recessed or semi-recessed silicon dioxide (SiO_2 or "oxide") regions in the non-active or field areas of the silicon substrate. This so-called Local Oxidation of Silicon (LOCOS) has become the most widely used isolation technology. In various forms, it remains the technique of choice for MOS device isolation.

A basic LOCOS process begins with the formation of a relatively thin (20-60 nm) pad-oxide layer over substantially an entire clean silicon (Si) wafer. Following the pad-oxide deposition, a silicon nitride (Si_3N_4 or "nitride") layer of about 100-200 nm thick is deposited. Subsequently, the wafer is masked and the nitride/pad-oxide is etched to define the active regions. The exposed regions are the inactive or field regions wherein the field oxide is grown. Prior to oxide growth, optional dopant implants may be carried out to create channel-stops located beneath the field oxide. The field oxide is typically thermally grown at about atmospheric pressure by means of wet oxidation, at temperatures of about 1000°C for 2-4 hours, resulting in oxide thicknesses in the range of 0.3-1.0 μm . Dry oxidation is usually not preferred because of the generally low oxidation rate which adds considerably to process throughput.

Even though the oxide grows substantially only within the regions defined by the masking nitride, some oxidant may diffuse laterally causing excess oxide to grow under the edges of the nitride mask, often forming a so-called "bird's beak" effect.

The bird's beak presents several problems for device isolation. Modifications of the basic LOCOS isolation process have succeeded in reducing the bird's beak considerably.

During the growth of the field oxide, another phenomenon occurs that causes defects in the structure, which later become detrimental to the thin gate oxide. Kooi, et al. (J. Electrochem. Soc., vol. 123, pp. 1117, 1976), discovered that a thin layer of silicon nitride can form on the silicon surface at the pad-oxide/silicon interface as a result of the reaction of ammonia (NH_3) and silicon. The ammonia is generated from the reaction between water vapor (H_2O) and the masking nitride during the field-oxidation step. The ammonia diffuses through the pad oxide and reacts with the silicon substrate to form silicon nitride spots or ribbons, sometimes called the *white ribbon* effect. Subsequently, when the gate oxide is grown, the growth rate becomes impeded at the locations where the silicon nitride has formed. The gate oxide is thus thinner at these locations than elsewhere, causing low-voltage breakdown of the gate oxide. One common way to eliminate this problem is to grow a "sacrificial" oxide layer after etching the masking nitride and pad-oxide layers. The sacrificial oxide is then removed before growing the final gate oxide. Clearly, however, the additional processes involved for eliminating the Kooi effect adds to the cost and complexity of ULSI fabrication.

Summary of the Invention

It is an object of the present invention to provide a field isolation process which obviates the need for sacrificial oxide growth and removal to eliminate parasitic silicon nitride inclusions. It is a further object of the present invention to provide a field oxidation process which prevents the formation of silicon nitride inclusions at the silicon/silicon dioxide interface. It is yet another object of the present invention to provide a field oxidation process which eliminates the use of hydrogen-containing oxidants, thereby preventing silicon nitride formation concurrent with the field oxide formation and achieve the requisite field oxide growth.

In accordance with one aspect of the present invention, a field isolation process comprises growing a field oxide region on a semiconductor wafer by means of a hydrogen-free oxidant. Preferably the oxidant comprises substantially only oxygen

and the field oxide process is preferably carried out at oxygen partial pressures greater than 10 atm and temperatures greater than about 900 °C.

In accordance with another aspect of the present invention, a method of growing a field oxide region on a semiconductor wafer comprises growing a first portion of the field oxide region by means of exposing a portion of the wafer to a first oxidizing ambient comprising water vapor. The field oxide region is completed by further exposing the portion of the wafer to a second oxidizing ambient comprising oxygen.

In accordance with yet another aspect of the present invention, a field isolation region on a semiconductor substrate is formed by a process comprised of exposing the field region of the semiconductor wafer to an oxidizing ambient comprising substantially only oxygen. More preferably, the isolation region is first exposed to an oxidizing ambient comprising at least in part water vapor, and subsequently exposed to the oxidizing ambient comprised of substantially only oxygen.

These as well as other objects and attributes of the present invention will become more fully apparent from the following description with reference to the accompanying drawings.

Brief Description of the Drawings

Figures 1A-1H is a schematic partial process flow illustrating a representative field isolation process and the accompanying Kooi effect.


Figure 2A-2B is a schematic partial process flow illustrating a field oxide grown by high pressure oxidation.

Figure 3A-3C is a schematic partial process flow illustrating a field oxide with encapsulated parasitic nitride.

Detailed Description of the Invention


As shown in Figure 1A, an exemplary conventional LOCOS process begins by depositing a buffer or pad-oxide layer (SiO_2) 14 of about 20-60 nm thick on a clean surface of a silicon wafer 12. The pad-oxide provides a stress relief buffer between the silicon surface and an overlaying silicon nitride layer. As shown in Figure 1B, a layer of silicon nitride 16 of about 100-200 nm thick is deposited on the pad-oxide. Silicon nitride is typically deposited by a chemical vapor deposition (CVD) of

dichlorosilane (SiH_2Cl_2) and ammonia (NH_3) at temperatures between 700°C and 800°C , according to the overall reaction:




A photolithographic process is then used to define the active regions. A resist pattern is normally used to protect all of the areas where the active devices will be formed. The nitride layer is then dry etched and the pad-oxide is etched by either a wet-or-dry-chemical process. Figure 1C illustrates an exemplary structure resulting from the masking and etch process. After the mask and etch process, optional dopant implants may be formed in the field regions, creating a channel-stop 20, as shown in Figure 1D. The channel-stop 20 is intended to provide enhanced device isolation and is thus mentioned by way of example as a common practice in LOCOS process integration. Moreover, the channel-stop implant 20 may be performed in other ways, for example after field oxide growth. It will be appreciated that such channel-stop implant processes may be integrated in a variety of ways, and are optional in the context of the present invention.

The field oxide is thermally grown by means of wet oxidation according to the general formula:




Typical field oxide layers 22 as shown in Figure 1E are grown to thicknesses of about 0.3 to $1.0\text{ }\mu\text{m}$. Wet oxidation is typically carried out at temperatures in the range of 900°C to 1200°C and oxidant partial pressures from about 0.2 to 25 atm. As a silicon oxidant, water vapor is conventionally preferable because of the generally high oxidation rate.

However, during growth of the field oxide 22, a parasitic inclusion of silicon nitride can form at the silicon/pad-oxide interface as a result of the reaction of released ammonia with silicon. Specifically, ammonia is released by the reaction of Si_3N_4 (Solid) and H_2O present during wet oxidation according to the approximate formula:



Ammonia released by the reaction diffuses through the SiO_2 pad-oxide layer and reacts with the silicon substantially at the Si/SiO_2 interface according to the general formula:



As shown in Figure 1E, the parasitic nitride inclusions 24 generally grow at the Si/SiO₂ interface adjacent to the field oxide 22. Subsequent nitride and pad-oxide etching processes leave the surface of the silicon substrate exposed for further processing. However, the nitride inclusions 24 are also present at the silicon surface, as illustrated in Figure 1F. Further processing is compromised by the presence of the nitride inclusions 24. For example, subsequent growth of a gate oxide layer requires a thin, high quality oxide having uniform thickness and composition. The nitride inclusions 24 cause the gate oxide to become thinner in these regions which ultimately contributes to device breakdowns. Thus, additional processing is needed to alleviate this problem.


As shown in Figure 1G, typically a sacrificial oxide layer 26 is grown over the silicon surface to an extent which substantially oxidizes the nitride inclusions 24. The sacrificial oxide 26 is then etched, leaving a silicon surface and field oxide 22 substantially free of the nitride inclusions 24, as illustrated in Figure 1H. The aforementioned sacrificial oxide growth and removal have, conventionally, been considered necessary process steps for alleviating the Kooi effect.

In accordance with the principles of the present invention, a preferred isolation process comprises utilizing a high pressure field oxidation (HiPox) process using an oxidant substantially free of hydrogen. In this respect, it is preferable to perform a field HiPox process using an oxidant such as oxygen (O₂) in place of H₂O. Performing the oxidation of silicon at high pressure significantly enhances the oxidation rate, thus compensating a possible lower oxidation rate of O₂ relative to that of H₂O. Performing a field oxidation using an oxidant, substantially free of hydrogen, such as substantially pure oxygen prevents formation of silicon nitride inclusions via the Kooi effect.


One embodiment of a preferred field oxidation process is illustrated in Figures 2A-2B. Figure 2A illustrates a wafer section processed up to the point of field oxidation. Previous processing steps may be substantially equivalent to that described in connection with Figures 1A-1D. As shown in Figure 2A, a starting structure may comprise the silicon substrate 12, pad-oxide layer 14, nitride mask 18 and optional channel-stop implant 20. Figure 2B illustrates the result of a high pressure field

oxidation using O₂ as the oxidant. The field oxide 20 is grown substantially similar to that described previously in connection with Figure 1E, except that the nitride inclusions 24 are eliminated.

A preferred HiPox process using O₂ follows the general formula:



It is possible that nitrogen (N₂) may be released in a possible accompanying reaction of O₂ with the masking nitride 18 according to the following approximate reaction or variations from stoichiometry thereof:



10 However, N₂ does not react significantly with the underlying silicon, as does the NH₃ released in the prior art field oxidation. A HiPox field oxidation is generally performed at partial pressures in the range of 5 atm to 30 atm, and in a temperature range of 900 °C to 1200 °C. Resulting oxidation rates may range from 2 nm/min. to 8 nm/min. Preferable HiPox processes are performed at O₂ partial pressures of about
15 25 atm, at 1000 °C resulting in oxidation rates of about 5 nm/min.

Having a field oxide substantially free of nitride inclusions 26 (Figure 1), allows subsequent processing without the need for sacrificial oxide growth as discussed in connection with Figures 1G and 1H.

Another preferred field oxidation process comprises a two-step operation,
20 whereby an initial field oxide is grown by wet oxidation followed by a HiPox oxidation step. As shown in Figure 3A, a possible starting structure may comprise the result of prior processing steps as described in connection with Figures 1A-1D. As shown in Figure 3B, a first partial field oxide 28 is grown by wet oxidation, as previously described in connection with Figure 1E. The wet oxidation process,
25 however, produces residual nitride inclusions 30. A second field oxidation is then performed by HiPox using an O₂ oxidant. As shown in Figure 3C, the HiPox step substantially completes the field oxide 32, and grows an oxide which consumes the nitride inclusions 30. Since the nitride inclusions are no longer located at the Si/SiO₂ interface, their influence on subsequent processing steps is ameliorated. Advantages
30 of the present embodiment include use of the relatively inexpensive and efficient wet

oxidation to create a portion of the field oxide, minimizing the more expensive HiPox process and eliminating the need for the sacrificial oxide.

Although described above with reference to the preferred embodiments, modifications within the scope of the invention may be apparent to those skilled in the art, all such modifications are intended to be within the scope of the appended claims.

WHAT IS CLAIMED IS:

1. A field isolation process comprising growing a silicon dioxide field isolation region on a semiconductor wafer by means of a hydrogen-free oxidant.

2. The process of Claim 1 wherein the oxidant comprises substantially only oxygen.

3. The process of Claim 1, further comprising exposing the semiconductor wafer to the oxidant at an oxidant partial pressure greater than 5 atm.

4. The process of Claim 1, further comprising maintaining the semiconducting wafer at a temperature greater than 900 °C.

5. A method of growing a field oxide region on a semiconductor wafer comprising the steps of:

growing a first portion of the field oxide region by means of exposing a portion of the wafer to a first oxidizing ambient comprising water vapor; and

growing a second portion of the field oxide region by means of exposing the portion of the wafer to a second oxidizing ambient comprising oxygen.

6. The method of Claim 5, wherein the first oxidizing ambient is maintained at a temperature greater than 900 °C and a pressure greater than 5 atm.

7. The method of Claim 5, wherein the second oxidizing ambient is maintained at a temperature greater than 900 °C and pressure greater than 5 atm.

8. A field isolation region on a semiconductor wafer formed by a process comprising:

exposing a field region of the semiconductor wafer to an oxidizing ambient comprising substantially only oxygen.

9. The field isolation region of Claim 8, wherein the oxidizing ambient is maintained at a pressure greater than 5 atm and a temperature greater than 900 °C.





10. The field isolation region of Claim 8, further comprising exposing the field region to an oxidizing ambient comprising water vapor prior to exposing the field region to the oxidizing ambient comprising substantially only oxygen.

[illegible]

5

10

Micron Reference No 95-0202

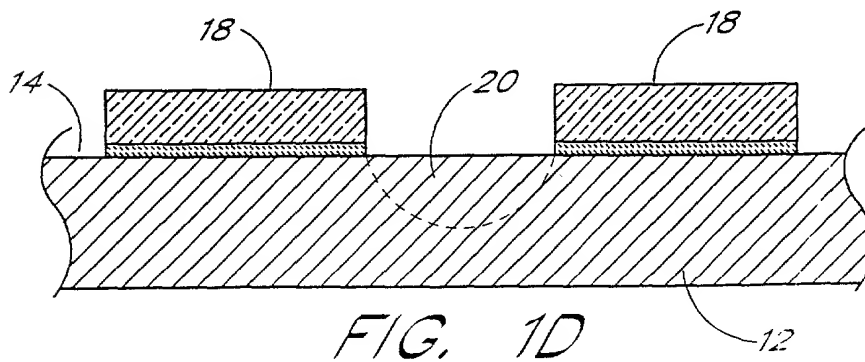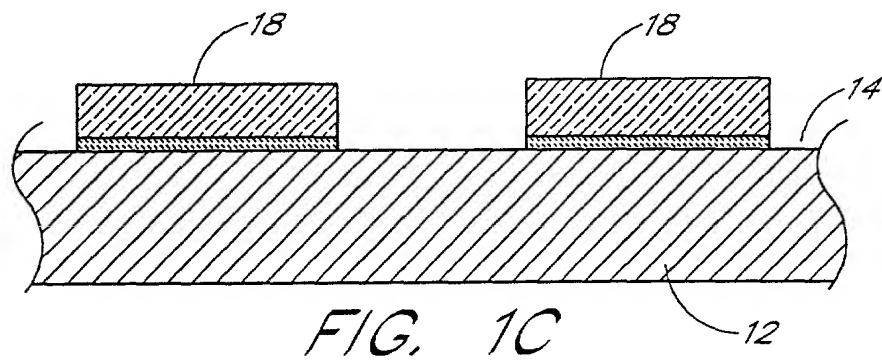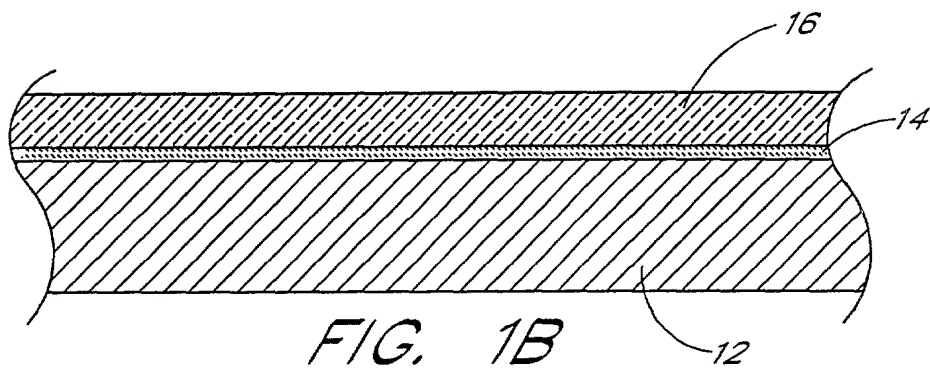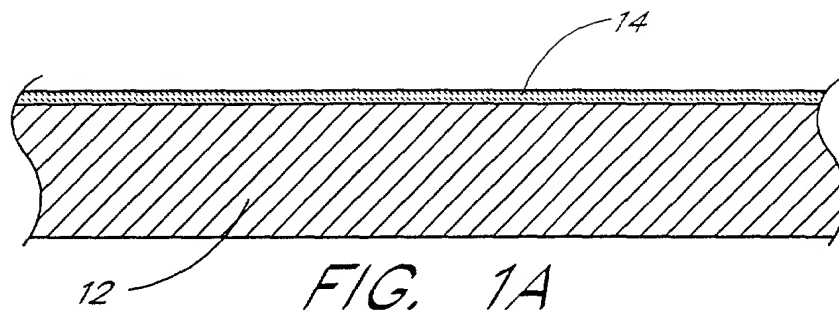

660720-2-0000

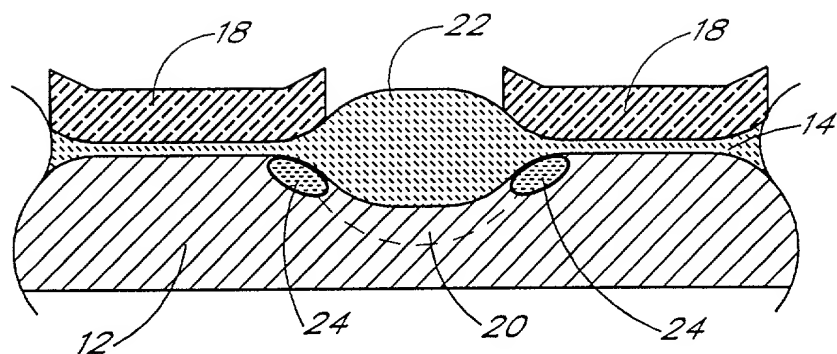


FIG. 1E

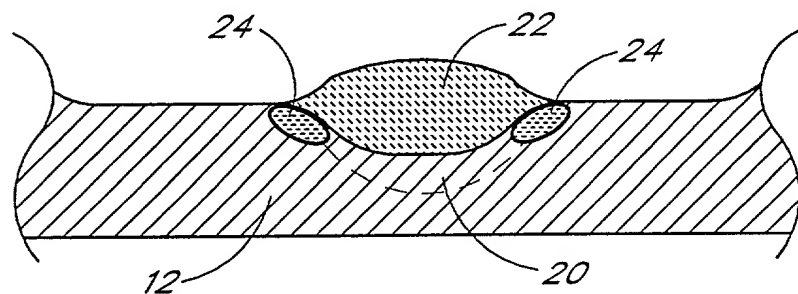


FIG. 1F

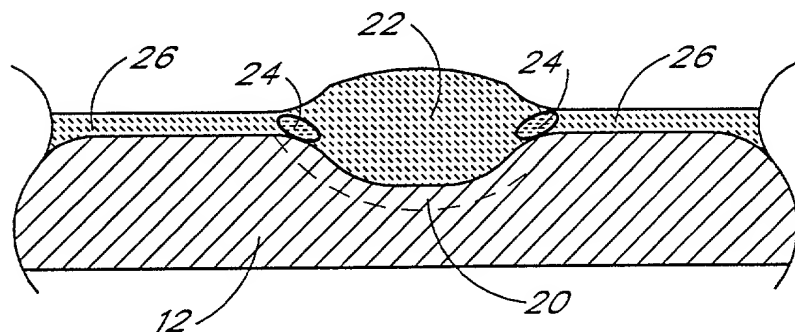


FIG. 1G

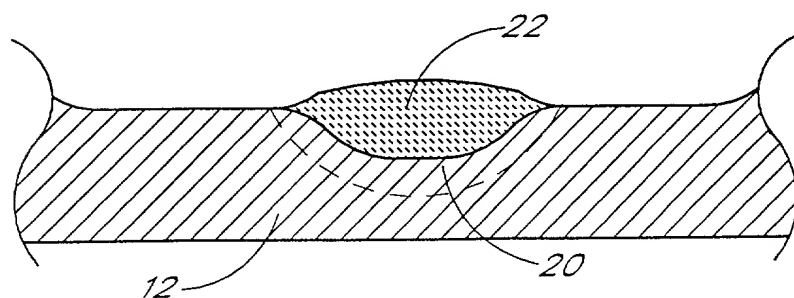


FIG. 1H

660760-464000

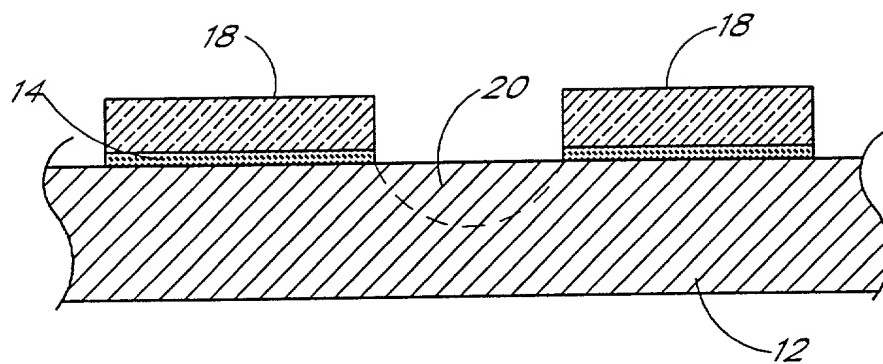


FIG. 2A

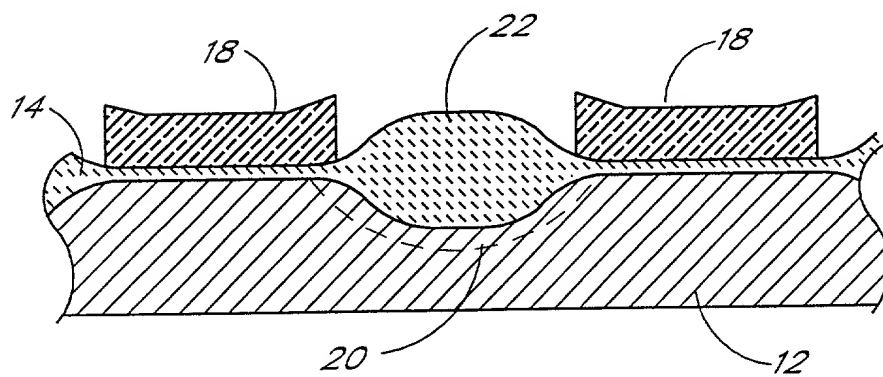


FIG. 2B

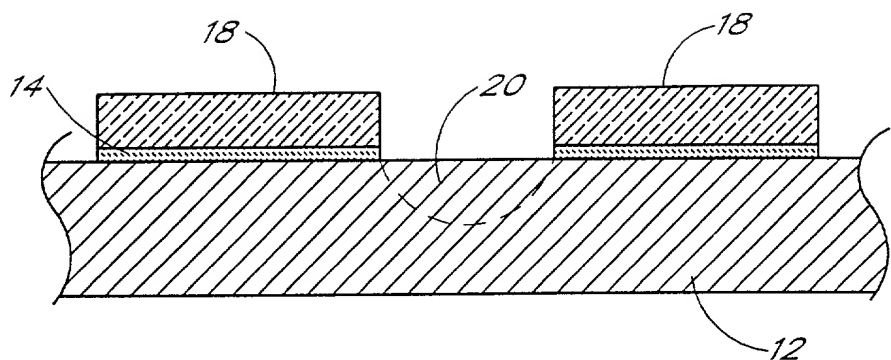


FIG. 3A

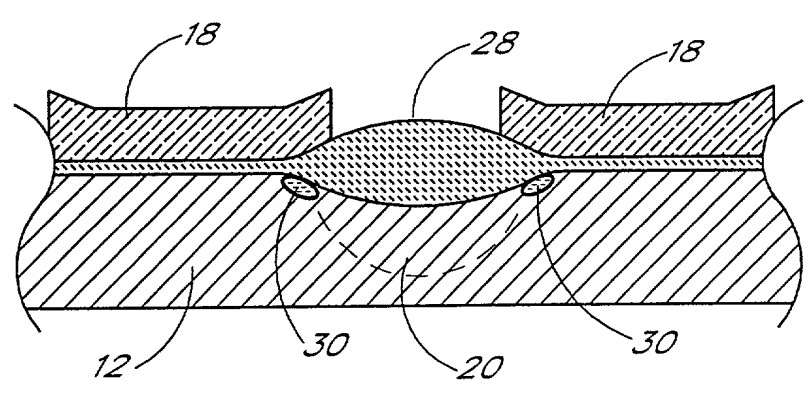


FIG. 3B

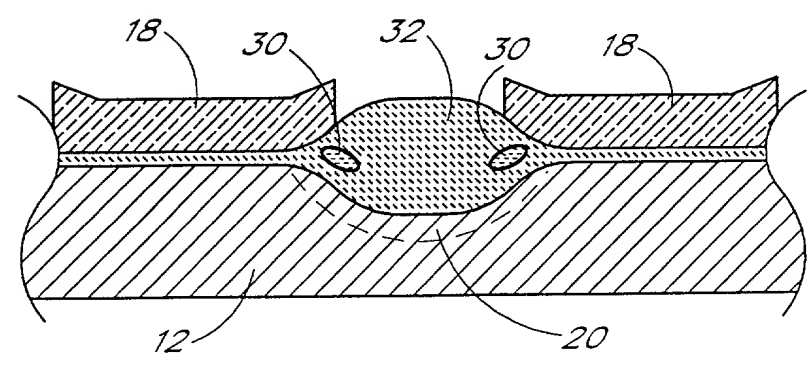


FIG. 3C

664460-00000000

DECLARATION - USA PATENT APPLICATION

COPY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled STREAMLINED FIELD ISOLATION PROCESS; the specification of which is attached hereto;

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above;

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56;

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful, false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first inventor: **Pierre C. Fazan**

Inventor's signature Pierre Fazan

Date 8/20/95

Residence: **4229 Rimview Way, Boise Idaho 83705**

Citizenship: **Switzerland**

Post Office Address: **as above**

Full name of second inventor: **Viju K. Mathews**

Inventor's signature

Date 8/15/95

Residence: **2659 E. Hancock Court, Boise, Idaho 83706**

Citizenship: **India**

Post Office Address: **as above**

Full name of third inventor: **Nanseng Jeng**

Inventor's signature

Date 8/22/95

Residence: **2590 E. Bergeson Street, Boise, Idaho 83706**

Citizenship: **Taiwan, R.O.C.**

Post Office Address: **as above**

Send Correspondence To:
KNOBBE, MARTENS, OLSON & BEAR
620 Newport Center Drive
Sixteenth Floor
Newport Beach, CA 92660-8016

Direct Telephone Calls To:
James B. Bear

(714) 760-0404

GVH-5356:jt
081095